
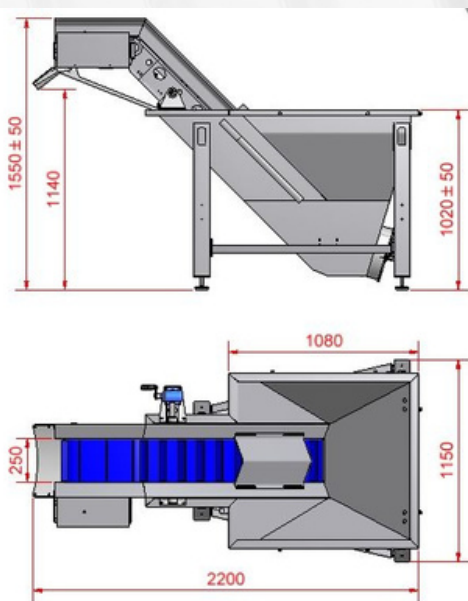


TECHNICAL DATA (0078-15550A)

- Weight: 200 kg
- Capacity: max. 1500 kg/h
- Voltage: 400 V, 3-phase, 50 Hz, if the drive 400 V, 1-phase, 50 Hz
- Connected load: 0,37 kW

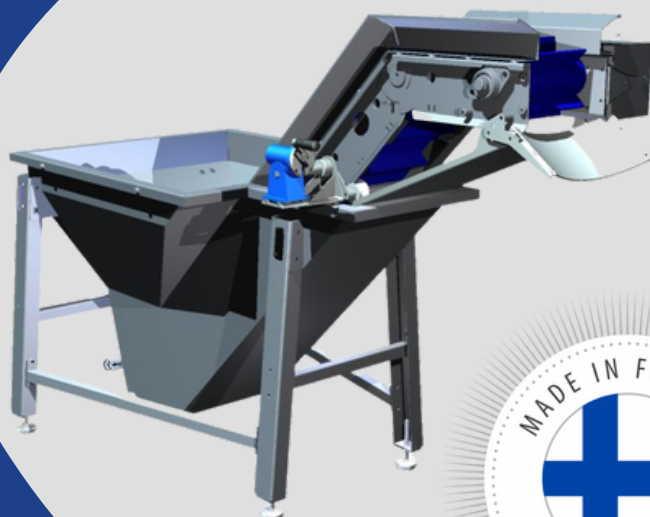

FF WATER CONVEYOR (SMALL)

“

The water conveyor is intended to be placed after a processing machine (such as peelers). In the water tank, excess starch is rinsed off the product. At the same time, the tissue of the product closes, which prevents the surface from drying and prolongs the product's shelf life.

The water conveyor also acts as a buffer tank for the products. The machine is easy to wash and the frame is made of stainless steel.

Manufactured by Forsfood Oy

”